



Glasdon
Fifty Years
of Progress



Glasdon

HANGING PLANTER -
Available as a single or two
tier display

FullBloom™ *Range*
Self Watering Planters

**RAIL MOUNTING
PLANTER -** Can be installed
in under one minute

FullBloom™ Range Self Watering Planters

HANGING PLANTERS

The unique innovative design of Glasdon FullBloom™ Planters encompasses a range of user benefits to help encourage a cascade of colourful, healthy plant growth with minimal maintenance. There are three models available in the FullBloom range, a single hanging planter, a hanging planter with additional tier and a rail mounting planter.




Single or Two Tier Displays

An optional two tier arrangement is available for the hanging planter. It gives extra height to displays whilst allowing smaller/less expensive plants to be accommodated in the middle of an arrangement.

Highly Secure Fixings

Glasdon FullBloom Hanging Planters have three stainless steel cables and a stainless steel security cable which reduces the possibility of unauthorised removal. The cable assembly has a breaking strain of half a tonne for added safety, (the equivalent weight of 220 x 5lb bags of potatoes).

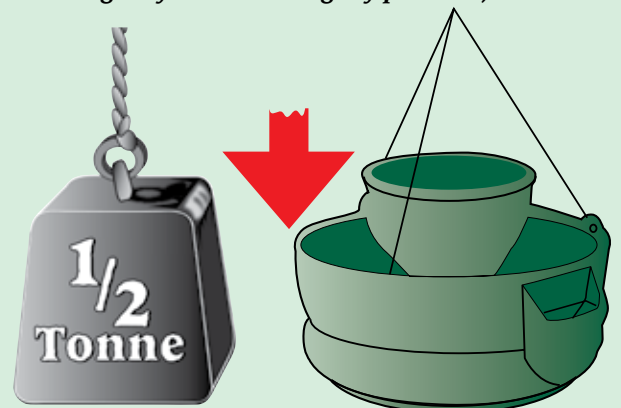

ALL-ROUND EASE OF USE

Easy to Handle



Easy to Clean and Store



Easy to Water



Durable Construction



Manufactured from tough, high quality Durapol® material, the FullBloom Planter range is durable and weather resistant. FullBloom Planters will not chip or rust, are easy to clean and never need painting.

These user benefits are available on both the Hanging Planter and the Rail Mounting Planter.


Dual, Self Watering System

Both planters have integrally moulded water reservoirs that are uniquely combined with our Hygromat™ capillary matting for lengthening the time between plant watering.



Healthy Plant Growth

Reservoir overflow outlets are positioned below soil level on both planters. This prevents the plant roots becoming waterlogged and allows air to circulate below soil level.

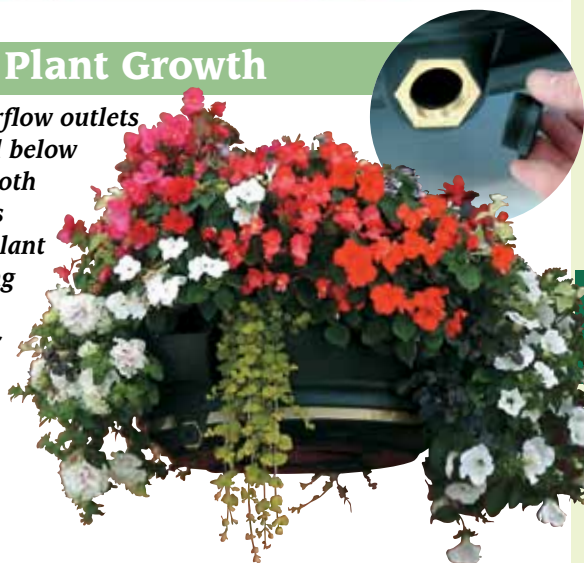

Filling Troughs

Each planter has two large filling troughs which are easy for the operator to locate and use. There are location arrows on the bottom of the planters to assist when watering.



Lifting Points

Two integral lifting points are located on both the hanging planter and the rail mounting planter.



RAIL MOUNTING



Fits 50mm and 70mm British Standard Railings

The FullBloom Rail Mounting Planter has a stepped recess in the base which allows the planter to be securely fitted to both British Standard sizes of railings (50mm and 70mm wide) without additional brackets. The recesses provide added stability helping prevent the planter rocking, as it is fixed firmly into position.



50mm Railing



70mm Railing

Kwik-Fix™ * Mounting System allows quick installation by one person.

(*Patent applied for)

The FullBloom Rail Mounting Planter can be easily sited by one person in under a minute!

Unique, integrally moulded Kwik-Fix fixing lugs allow the planter to be quickly mounted on to a railing with Tamtorque® banding. (Banding is supplied as standard, a power tool bit can be supplied as an optional extra.) This provides a very tight and secure fixing, without the need for additional brackets.



FullBloom Rail Mounting Planter can be installed or removed from the railing even when fully planted.

PLANTERS



1 Locate planter onto the railing ensuring that the railing sits correctly inside the recess in the base of the planter.



2 Ensure the buckle is located on the Tamtorque band, then thread the band through the railing and around the Kwik-Fix fixing lug.



3 Locate the banding tongue to the buckle, then tighten the banding using a hand or power tool until the band is completely tight.



4 Finally push any excess banding through the buckle to achieve a neat and safe fixing.

SPECIFICATIONS

FullBloom Hanging Planter

Dimensions

Standard Hanging Planter

Maximum Internal Diameter:	500mm
Internal Planting Depth:	170mm
External Diameter:	538mm
Maximum Width:	658mm
Height:	269mm
Reservoir Capacity:	10 litres

Extra Tier

Maximum Internal Diameter:	260mm
Internal Planting Depth:	155mm
External Diameter:	295mm
Height (including main planter):	360mm
Reservoir Capacity:	2 litres

Colours

Black (100% recycled material) or **Deep Green**. (Both colours of material are recyclable after their usable life.)

Materials

Planter and Extra Tier: **Durapol®**. Durapol material is a polymer formulated to withstand extremes of temperature and is impact-tested in our Quality Assurance Laboratory as part of our BS EN ISO 9001:2000 test procedure. Durapol material will not chip or rust, is easy to clean and never needs painting.

Capillary Matting: **Hygromat™**



Optional Extras

Bracket for wall-mounting



A heavy duty wall-mounting bracket can be supplied as an optional extra. Constructed in mild steel with Armortec® corrosion resistant coating.

Due to the weight of the planter when full, we would recommend that the Glasdon wall fixing bracket be used. Glasdon UK cannot be held responsible for incorrect installation or failure of brackets that have not been supplied by Glasdon.

(Please note:- we would recommend that a site survey must be carried out before installation to establish the most suitable type of fixings for the wall structure.)

Gold Banding



FullBloom Hanging Planters have a moulded-in band recess to take optional Gold Banding.

Personalisation/Sponsorship

FullBloom Hanging Planters have a moulded-in Base Recess to take A5 size Personalisation or Sponsorship as an optional extra. For more information on personalisation of FullBloom Hanging Planters, please contact our Sales Office on **01253 600410**.



FullBloom Rail Mounting Planter

Dimensions

Maximum Internal Depth:	200mm
Maximum Internal Length:	1284mm
Maximum External Length:	1374mm
Maximum External Height:	306mm
Reservoir Capacity:	15 litres

Colours

Black (100% recycled material) or **Deep Green**. (Both colours of material are recyclable after their usable life.)

Materials

Planter: **Durapol®**. Durapol material is a polymer formulated to withstand extremes of temperature and is impact-tested in our Quality Assurance Laboratory as part of our BS EN ISO 9001:2000 test procedure. Durapol material will not chip or rust, is easy to clean and never needs painting.

Optional Extras

Gold Banding



FullBloom Planters have a moulded-in band recess to take optional Gold Banding.

Power Tool Bit



Allows a battery operated drill/screwdriver to be used to tighten the Tamtorque® banding.

Floor Mounting Bracket



Secure installation allowing the planter to be floor mounted onto a prepared concrete foundation or concrete paving.

Wall Mounting Bracket



A heavy duty wall mounting bracket can be supplied allowing the planter to be fixed onto a wall.

Capillary Matting: **Hygromat**
Tamtorque Banding: **Stainless Steel**

How To Order

To order direct from this Leaflet, simply write to us at the address shown or alternatively telephone 01253 600410, fax 01253 792558, or e-mail: sales@glasdon-uk.co.uk

FREE DELIVERY IN MAINLAND UK & NORTHERN IRELAND.

Our national distribution network ensures prompt delivery in mainland UK and Northern Ireland. All our prices are carriage-free on the mainland and Northern Ireland for orders over £50 value, only VAT will be added. However, to help offset the cost of packing, administration and delivery, there is a small charge of £5 on orders below the value of £50.

Glasdon®, Armortec, Durapol, FullBloom, Hygromat, Kwik-Fix and Tamtorque are trademarks or registered trademarks of GLASDON GROUP or its subsidiaries in the UK and other countries.

Glasdon Group Limited Is An Equal Opportunities Employer.

© Glasdon UK Ltd. 05/2009. Glasdon reserve the right to alter price and specification without prior notice. LM/ST



Glasdon®

Glasdon U.K. Limited

Preston New Road
BLACKPOOL
Lancashire
FY4 4UL

Tel: (01253) 600410
Fax: (01253) 792558
e-mail: sales@glasdon-uk.co.uk
web: www.glasdon.com



recycle 80% recycled
When you have finished with this leaflet please recycle it. This leaflet is printed on 80% recycled paper.