

Dog Waste Bin Installation Instructions

PERMANENT POST MOUNTING




IMPORTANT NOTE:- ENSURE THAT ALL RELEVANT PERSONNEL READ THE POINTS LISTED BELOW AND THAT A COPY IS PASSED ON TO STAFF INVOLVED WITH THE INSTALLATION

YOU SHOULD HAVE

- A - Bin Outer c/w Lid
- B - Washer Plates x 2
- C - Hex Head Screw x 6
- D - Extension Bracket x 1
- E - 'C' Bracket x 2
- F - Top Bracket Assembly x 1

EQUIPMENT NEEDED

Spanner

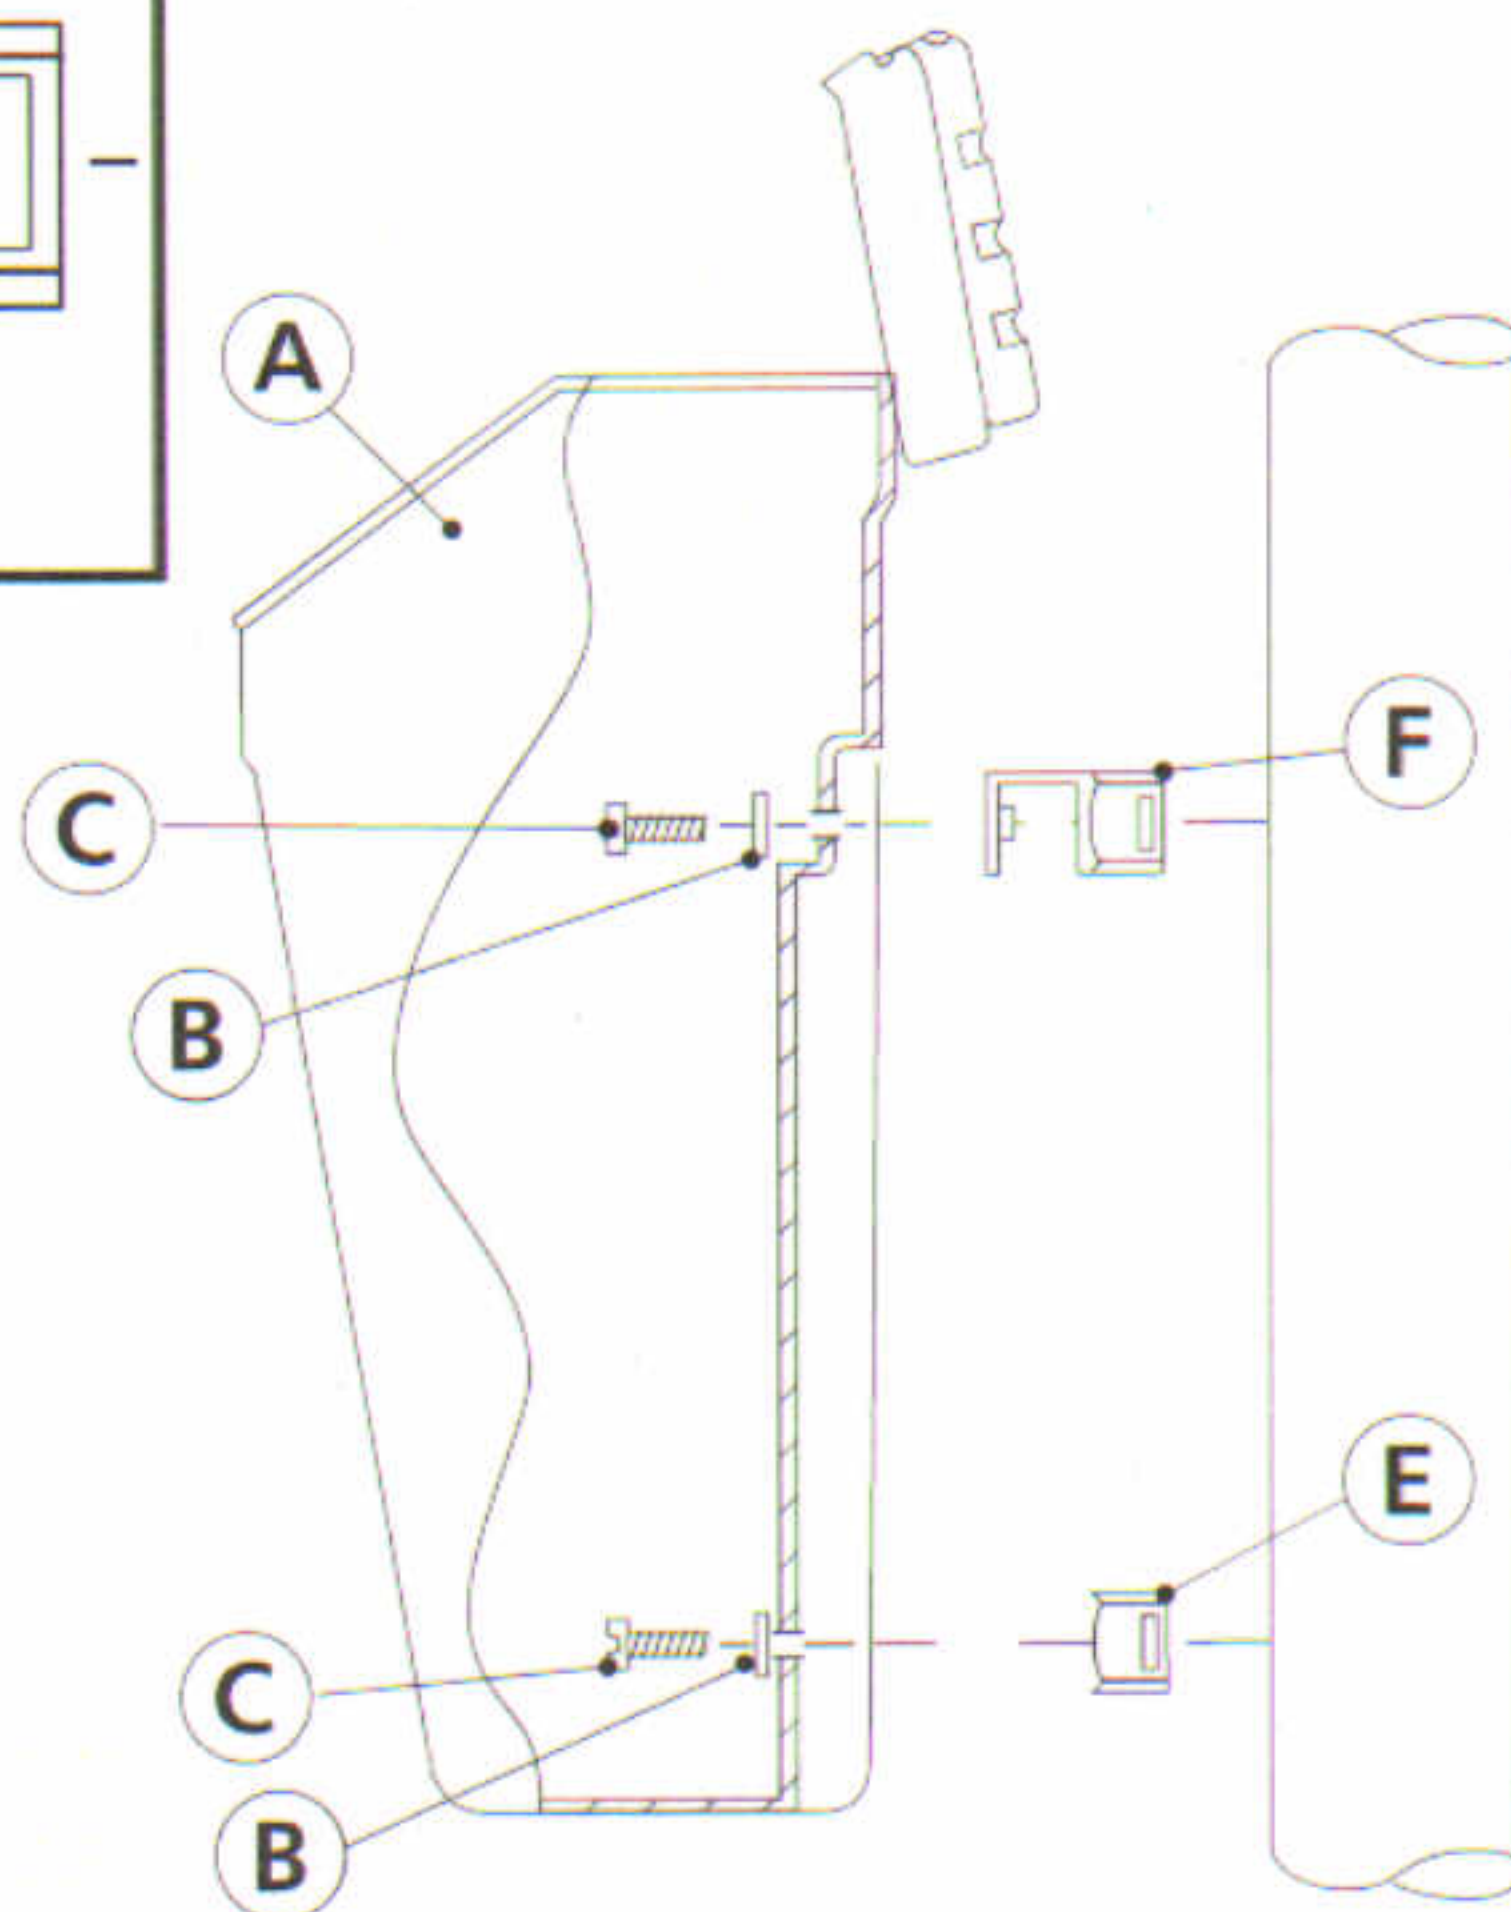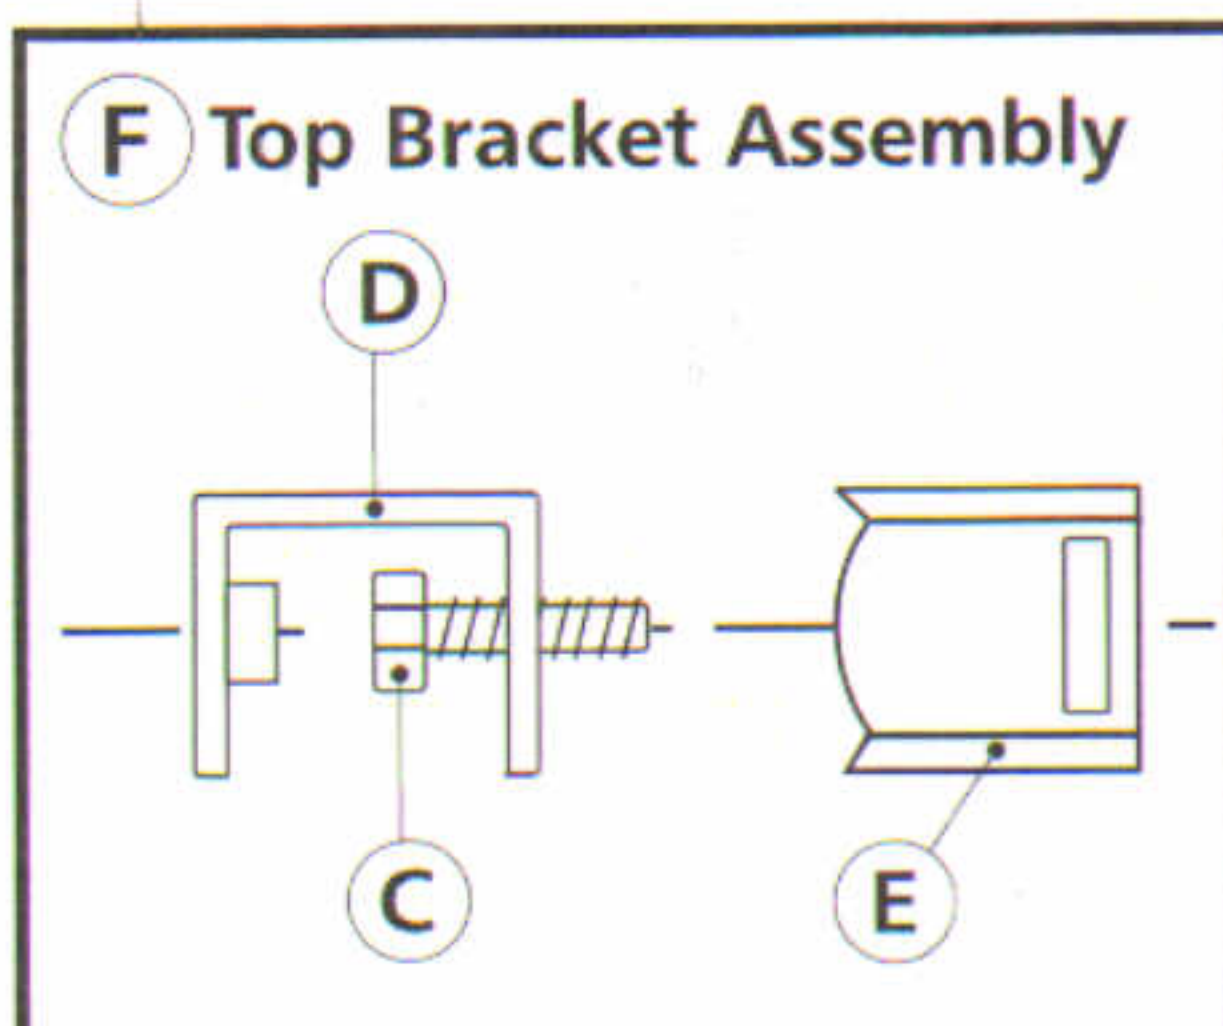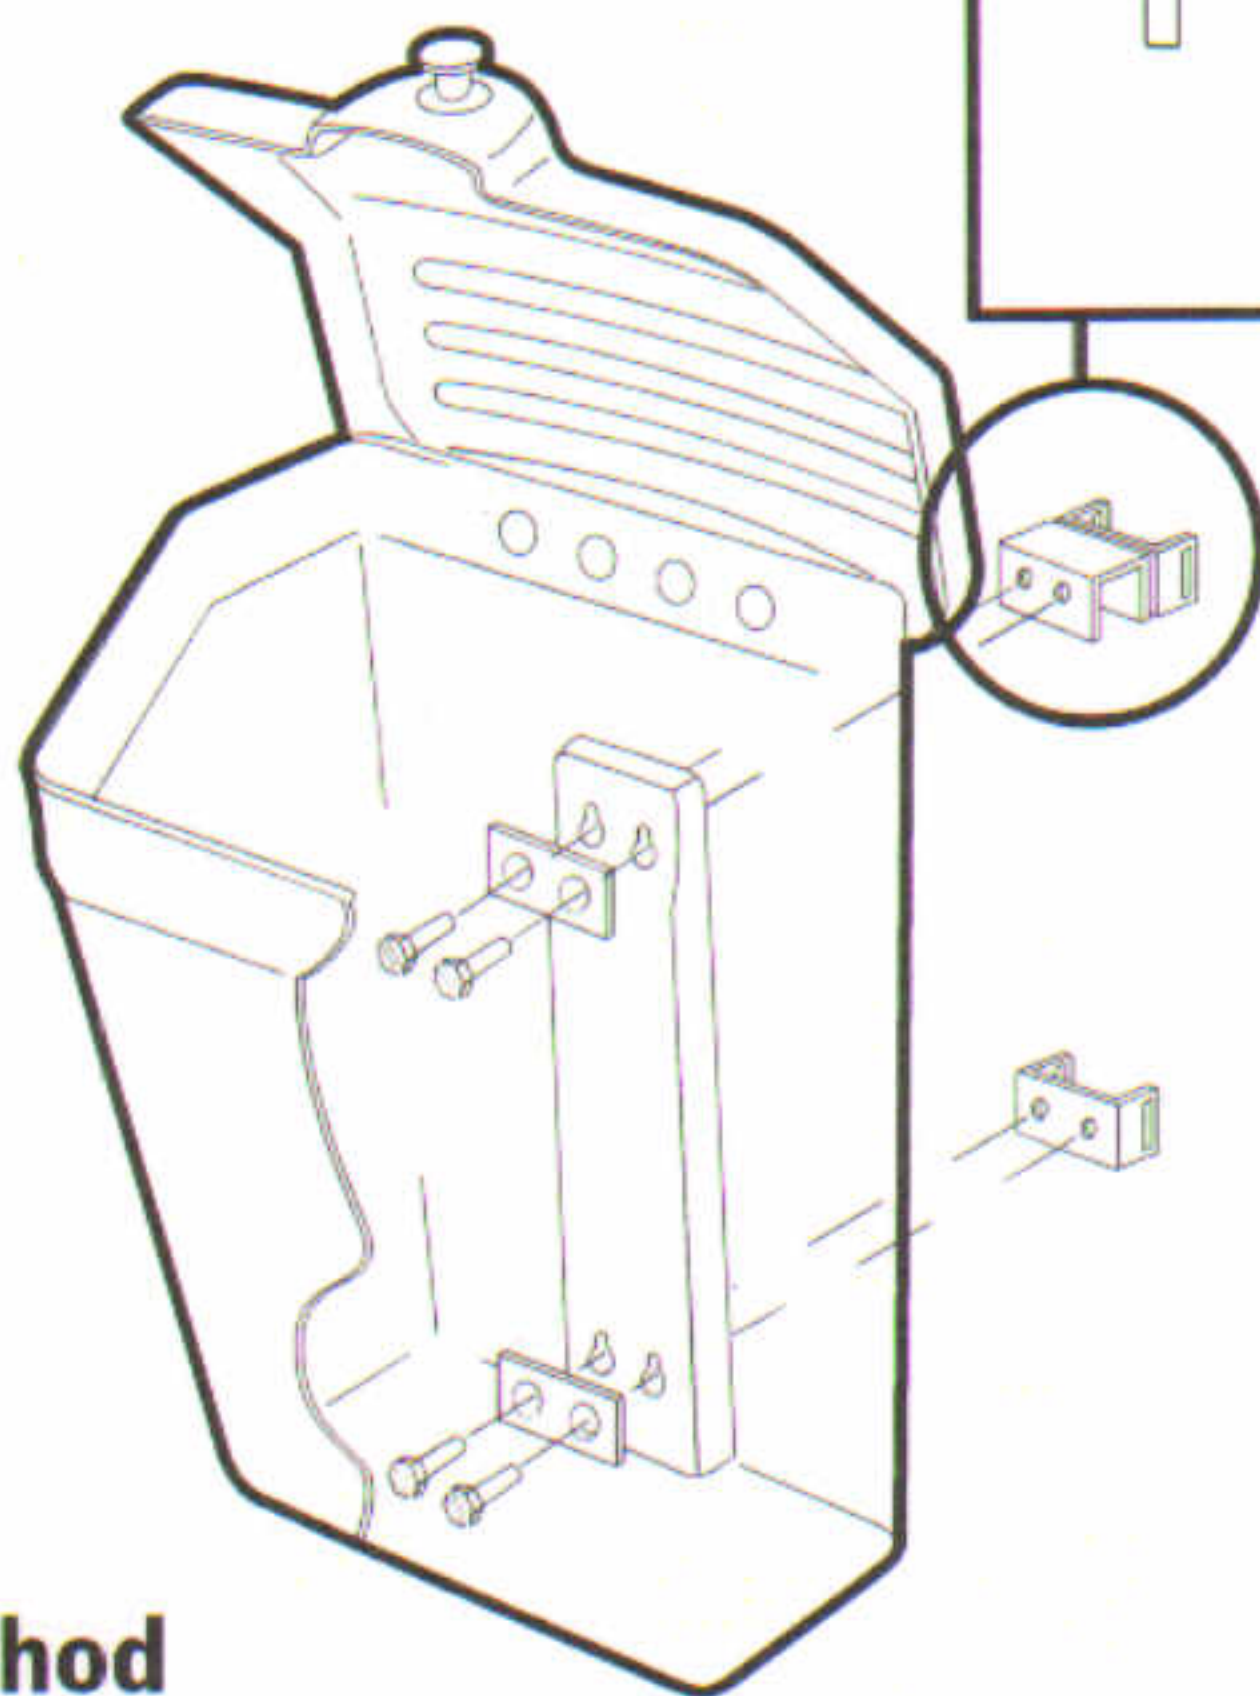


Method

1 UPPER MOUNTING

Construct the top bracket assembly as shown (F). Hold the assembly (F) against the back of the bin body, in line with the top pair of pre-drilled holes. Using the washer plate (B) and the two hex-head screws (C) fix the bracket assembly to the bin.

2 LOWER MOUNTING

Repeat the fixing operation with second 'C' bracket (E), attach it to the bin through the lower pair of pre-drilled holes.

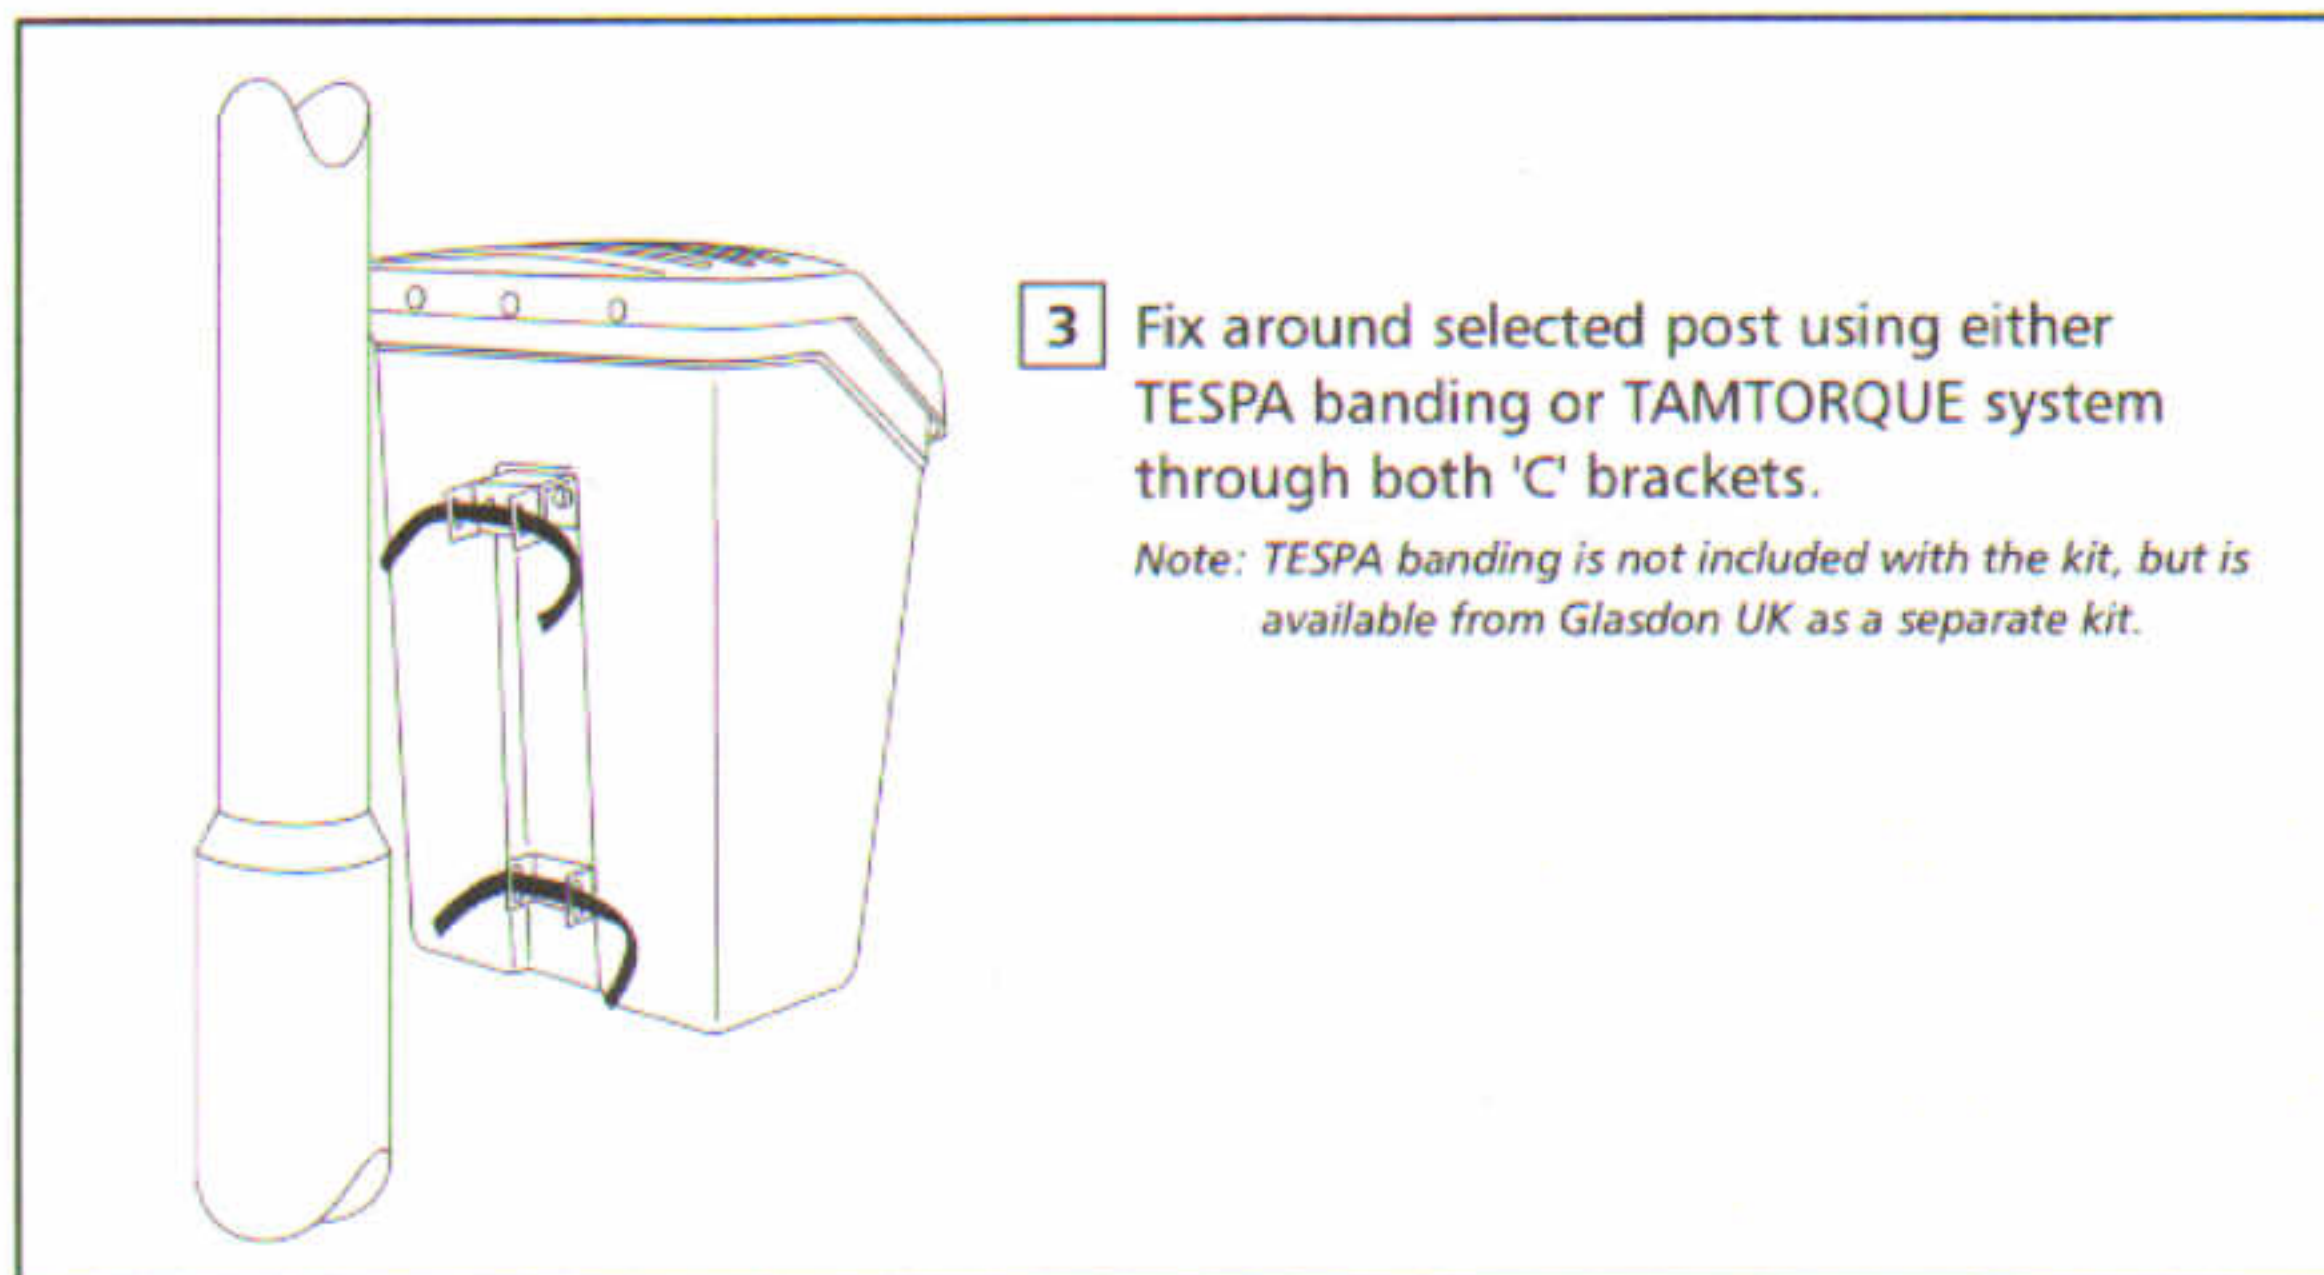

- ##### 3
- Fix around selected post using either TESPABANDING or TAMTORQUE system through both 'C' brackets.

Note: TESPABANDING is not included with the kit, but is available from Glasdon UK as a separate kit.

- A planned maintenance schedule of regular inspection is recommended, replacing components as necessary.
- Replacement components are available direct from GLASDON.
- GLASDON cannot be held responsible for claims arising from incorrect installation, unauthorised modifications or misuse of the product.



Glasdon®

Glasdon U.K. Limited

Preston New Road
BLACKPOOL
Lancashire
FY4 4UL

Tel: (01253) 600410

Fax: (01253) 792558

e-mail: sales@glasdon-uk.co.uk

web: www.glasdon.com