


IMPORTANT NOTE: ENSURE THAT ALL RELEVANT PERSONNEL READ THESE INSTRUCTIONS PRIOR TO USE

OPENING YOUR NEXUS 30




1. Using finger lip at front of lid, lift lid upwards.

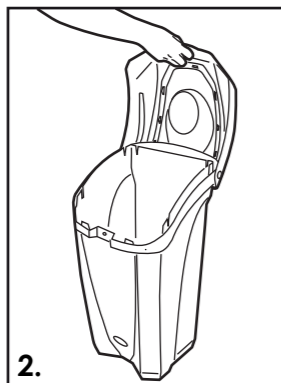


2. Lift lid to upright position until it is held by stay feature.

LOCKING/UNLOCKING YOUR NEXUS 30

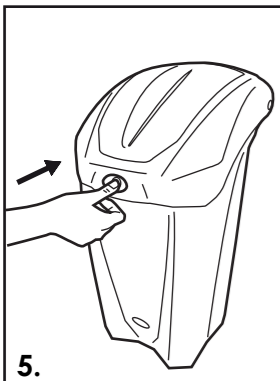


5. The Confidential Paper model comes complete with push lock located on front of bin. With lid closed, push lock centre to lock unit.

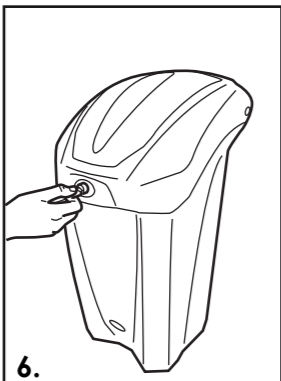


6. Using key provided unlock bin. (Lock is available as an optional extra on all models.)

ATTACHING A SIGN KIT TO YOUR NEXUS 30

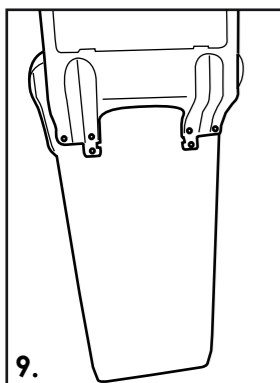


9. Open lid and position sign carrier at rear of bin so that the holes are aligned with holes in bin.

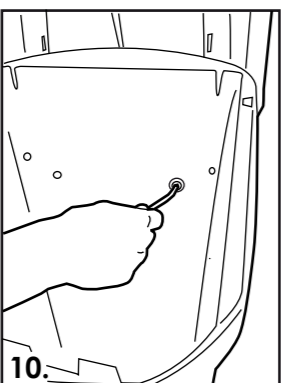


10. From inside of bin, place 4 off screws with washers provided through holes and fix on back of bin with washers and nyloc nuts (using your fingers.) Using a 10mm spanner and allen key tighten nuts until secure.

SECURING SACK IN POSITION

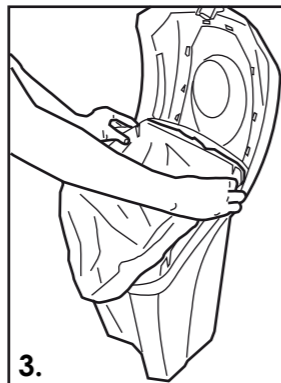


3. With lid open, install correct size sack (330mm x 533mm x 600mm available from Glasdon) by firstly hooking onto retention lugs at back of bin.

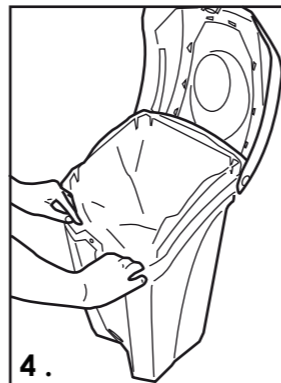


4. Stretch sack and hook over side and front lugs so that sack does not over hang body of bin. Close lid securing sack in position.

EMPTYING YOUR NEXUS 30

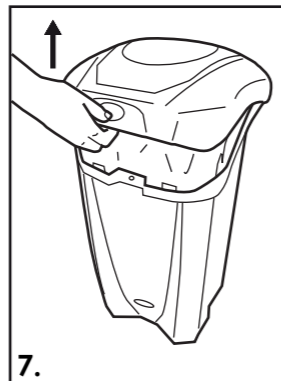


7. Open lid as shown above.

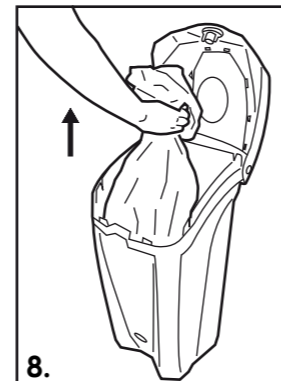


8. Unhook sack from lugs and lift sack out of bin.

INSERTING A4 SIGN

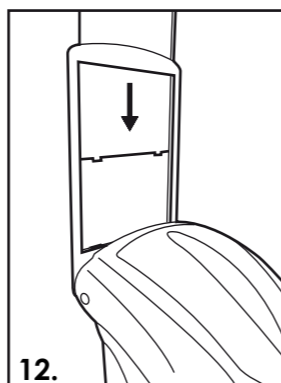


12. Place A4 sign behind clear polycarbonate sheet and slide into sign carrier so that lugs locate into slots along bottom of sign carrier. **P.1**


PERMANENT WALL FIXING KIT

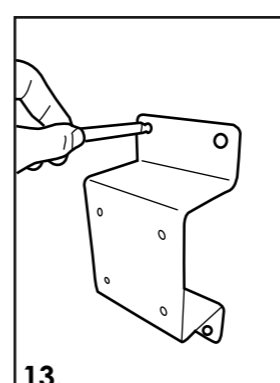


13. Using wall fixing bracket as template, mark out 4 off drill holes at top and bottom of bracket.

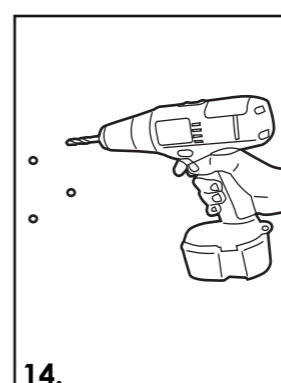

14. Using a 7mm diameter masonry bit, drill 4 off holes into wall. Place a rawl plug provided into each drilled hole.

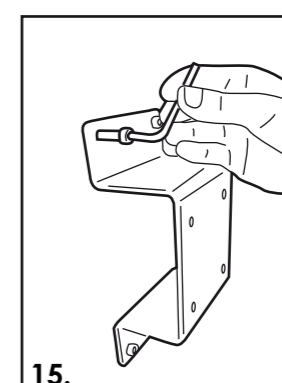


15. Align wall fixing bracket with drilled holes and screw 4 off M5.5 x 50mm screws provided into wall using security allen key.

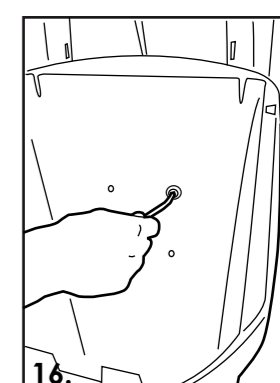


16. Holding bin up to wall bracket, place 4 off M6 x 16mm screws and washers provided through holes on inside of bin and fix with nyloc nuts using your fingers. Using a 10mm spanner and allen key provided tighten nuts until secure.


LIFT OFF WALL FIXING KIT

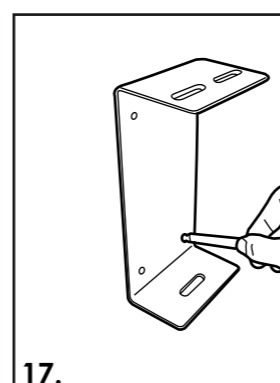


17. Using wall fixing bracket as template, mark out 4 off drill holes at top and bottom of bracket.

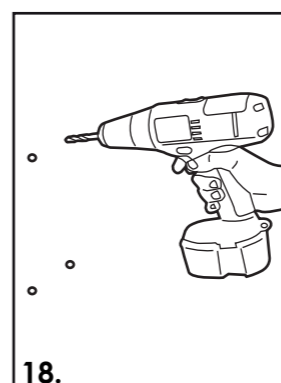

18. Using a 7mm diameter masonry bit, drill 4 off holes into wall. Place a rawl plug provided into each drilled hole.

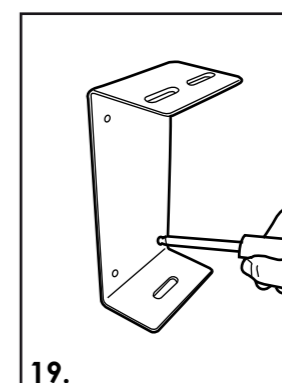

19. Align wall fixing bracket with drilled holes ensuring two slots are positioned at top and single slot at bottom. Screw 4 off 1.5'' screws with washers (provided) into wall using a screw driver.

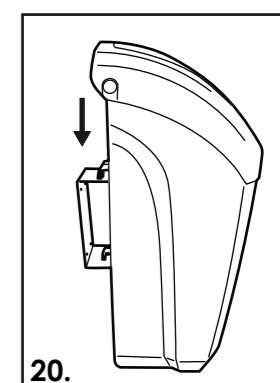

20. With the 3 off brackets already attached to the bin, hook the bin onto wall bracket so that the hooks locate into the slots.