



MODEL SPECIFICATION FLEXMASTER®

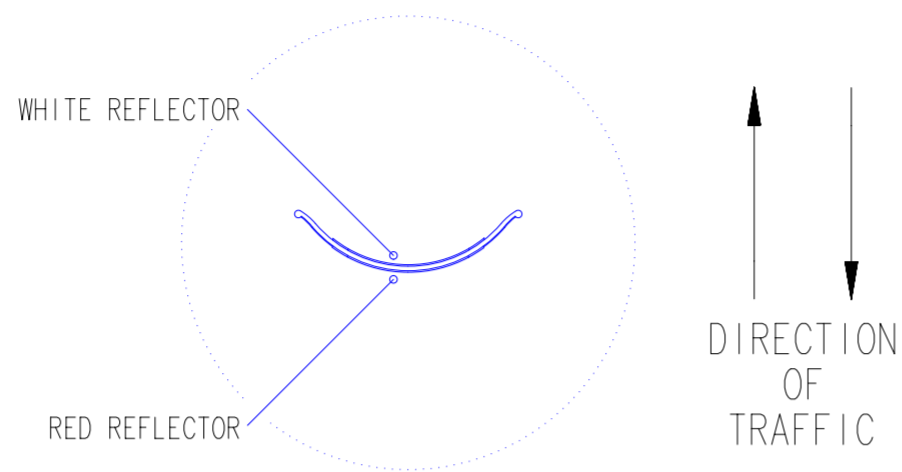

PLAN VIEW (NEAR SIDE)

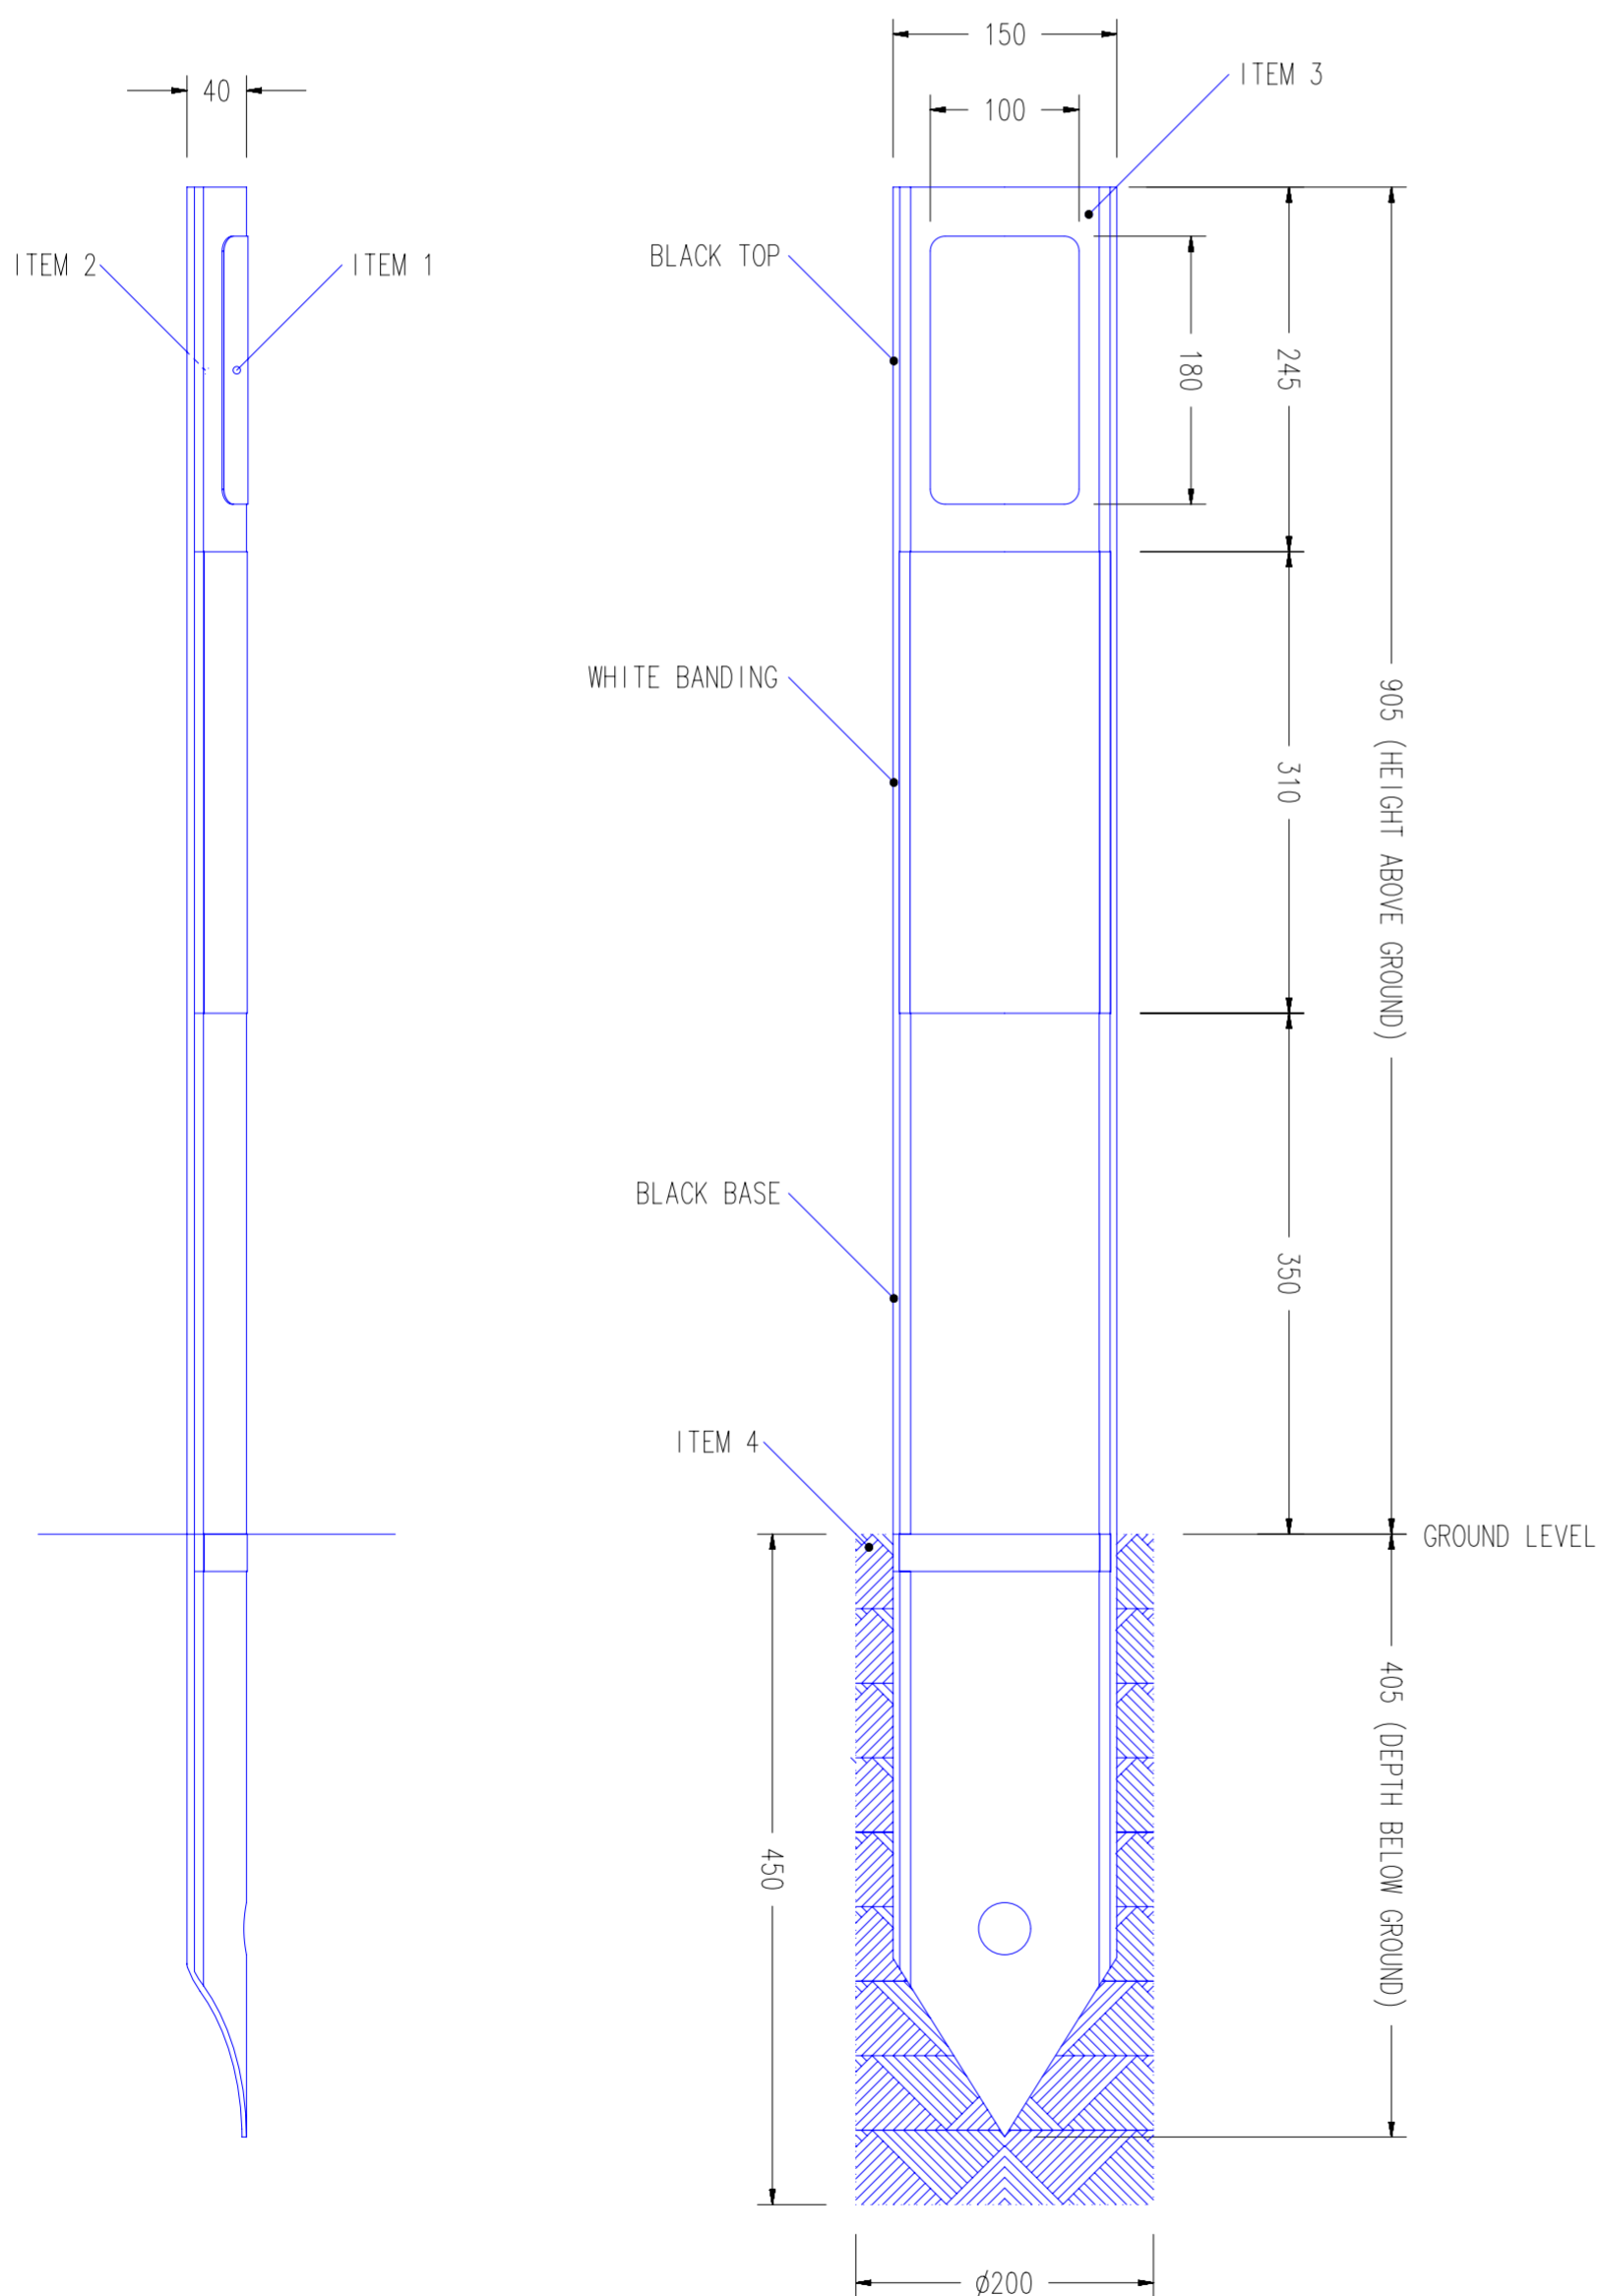

SIDE VIEW

FRONT VIEW (NEAR SIDE)

PRODUCT INFORMATION:

- WEIGHT - 1.0 Kg
- MATERIAL - Ultraflex Post
- COLOURS - Black Post, White Banding & Reflector (See Colour Options)
- DIMENSIONS - All Dimensions in mm unless otherwise stated
- ITEM 1 - Retro Reflector - Microprismatic (Red)
- ITEM 2 - Retro Reflector - Microprismatic (White)
- ITEM 3 - Flexmaster Standard c/w Band and Reflectors
- ITEM 4 - Subsoil " "

TECHNICAL REFERENCE:

- Conforms with the requirements of 'The Statutory Instruments No. 3113 - The Traffic Signs Regulations & General Directions 2002 (TSRGD) - Diagram 561.
- Complies with the 'Department for Transport Traffic Signs Manual, Chapter 4, Warning Signs, 2013
- Type R1 Retro-reflectors are available to class RA2 or class 3 as defined in EN 12899-3-2007
- The Retroreflector Surface Area is in accordance with Diagram 561 (TSRGD).

INSTALLATION GUIDE:

- Provides quick, low cost installation, particularly in soft earth without digging holes or concreting.
- Post to be positioned in orientation shown in detail plan view, to ensure Flexmaster is positioned correctly.
- Ensure reflectors are positioned in correct orientation. Red Reflector faces oncoming traffic on the near-side. White Reflector faces oncoming traffic on the off-side. Amber Retro-reflector faces oncoming traffic on the off-side of dual carriageways.
- Installation - Using Glasdon Installation Tool
 - (1) Push tool into ground using pile-driving action. When lower hand grip meets ground, remove tool using reverse pile-driving action.
 - (2) Place Flexmaster post point into pilot hole and push down lightly.
 - (3) Invert tool so blade is uppermost. Place cap on post so tool body rests against concave post face. Holding hand grip, raise high and pile drive until main body of tool hits the ground.
 - (4) Remove tool and Flexmaster post will be firmly fixed at over 400mm below ground.
- Avoid contact with hot Tarmac as this will seriously impair the performance of the Flexmaster post.
- We recommend installing into subsoil, but exact installation requirements should be assessed from a site survey.
- Alternatively, can be installed into a hole and back filled with subsoil. Do not concrete in as this will affect performance. Recommended hole size $\phi 200 \times 450$ mm deep.
- Not suitable for hard ground.

OPTIONAL PARTS / SPARES:

- Standard Flexmaster Upright
- Microprismatic Red Reflectors (Pack of 5)
- Microprismatic White Reflectors (Pack of 5)
- Microprismatic Amber Reflectors (Pack of 5)
- Barb for permanent fixing
- Flexmaster fixing tool



website: www.glasdon.com
 e-mail: sales@glasdon.com
 Telephone: 01253 600400
 Facsimile: 01253 792558

Copyright and/or design right in this representation and the product it depicts is reserved by Glasdon Group Limited. The issue of this drawing, is a confidential disclosure of its contents, and is made on condition that it is neither disclosed to a third party, nor any item described here in and designed by Glasdon Group Limited, is produced either in whole or in part without the written consent of Glasdon Group Limited.

SPECIFICATION NUMBER - 02S014-S01	ISSUE 08
GLASDON GROUP LTD 18/02/15	SHEET SIZE: A2