
MODEL SPECIFICATION NEOPOLITAN[®] DELINEATOR - SURFACE MOUNTED

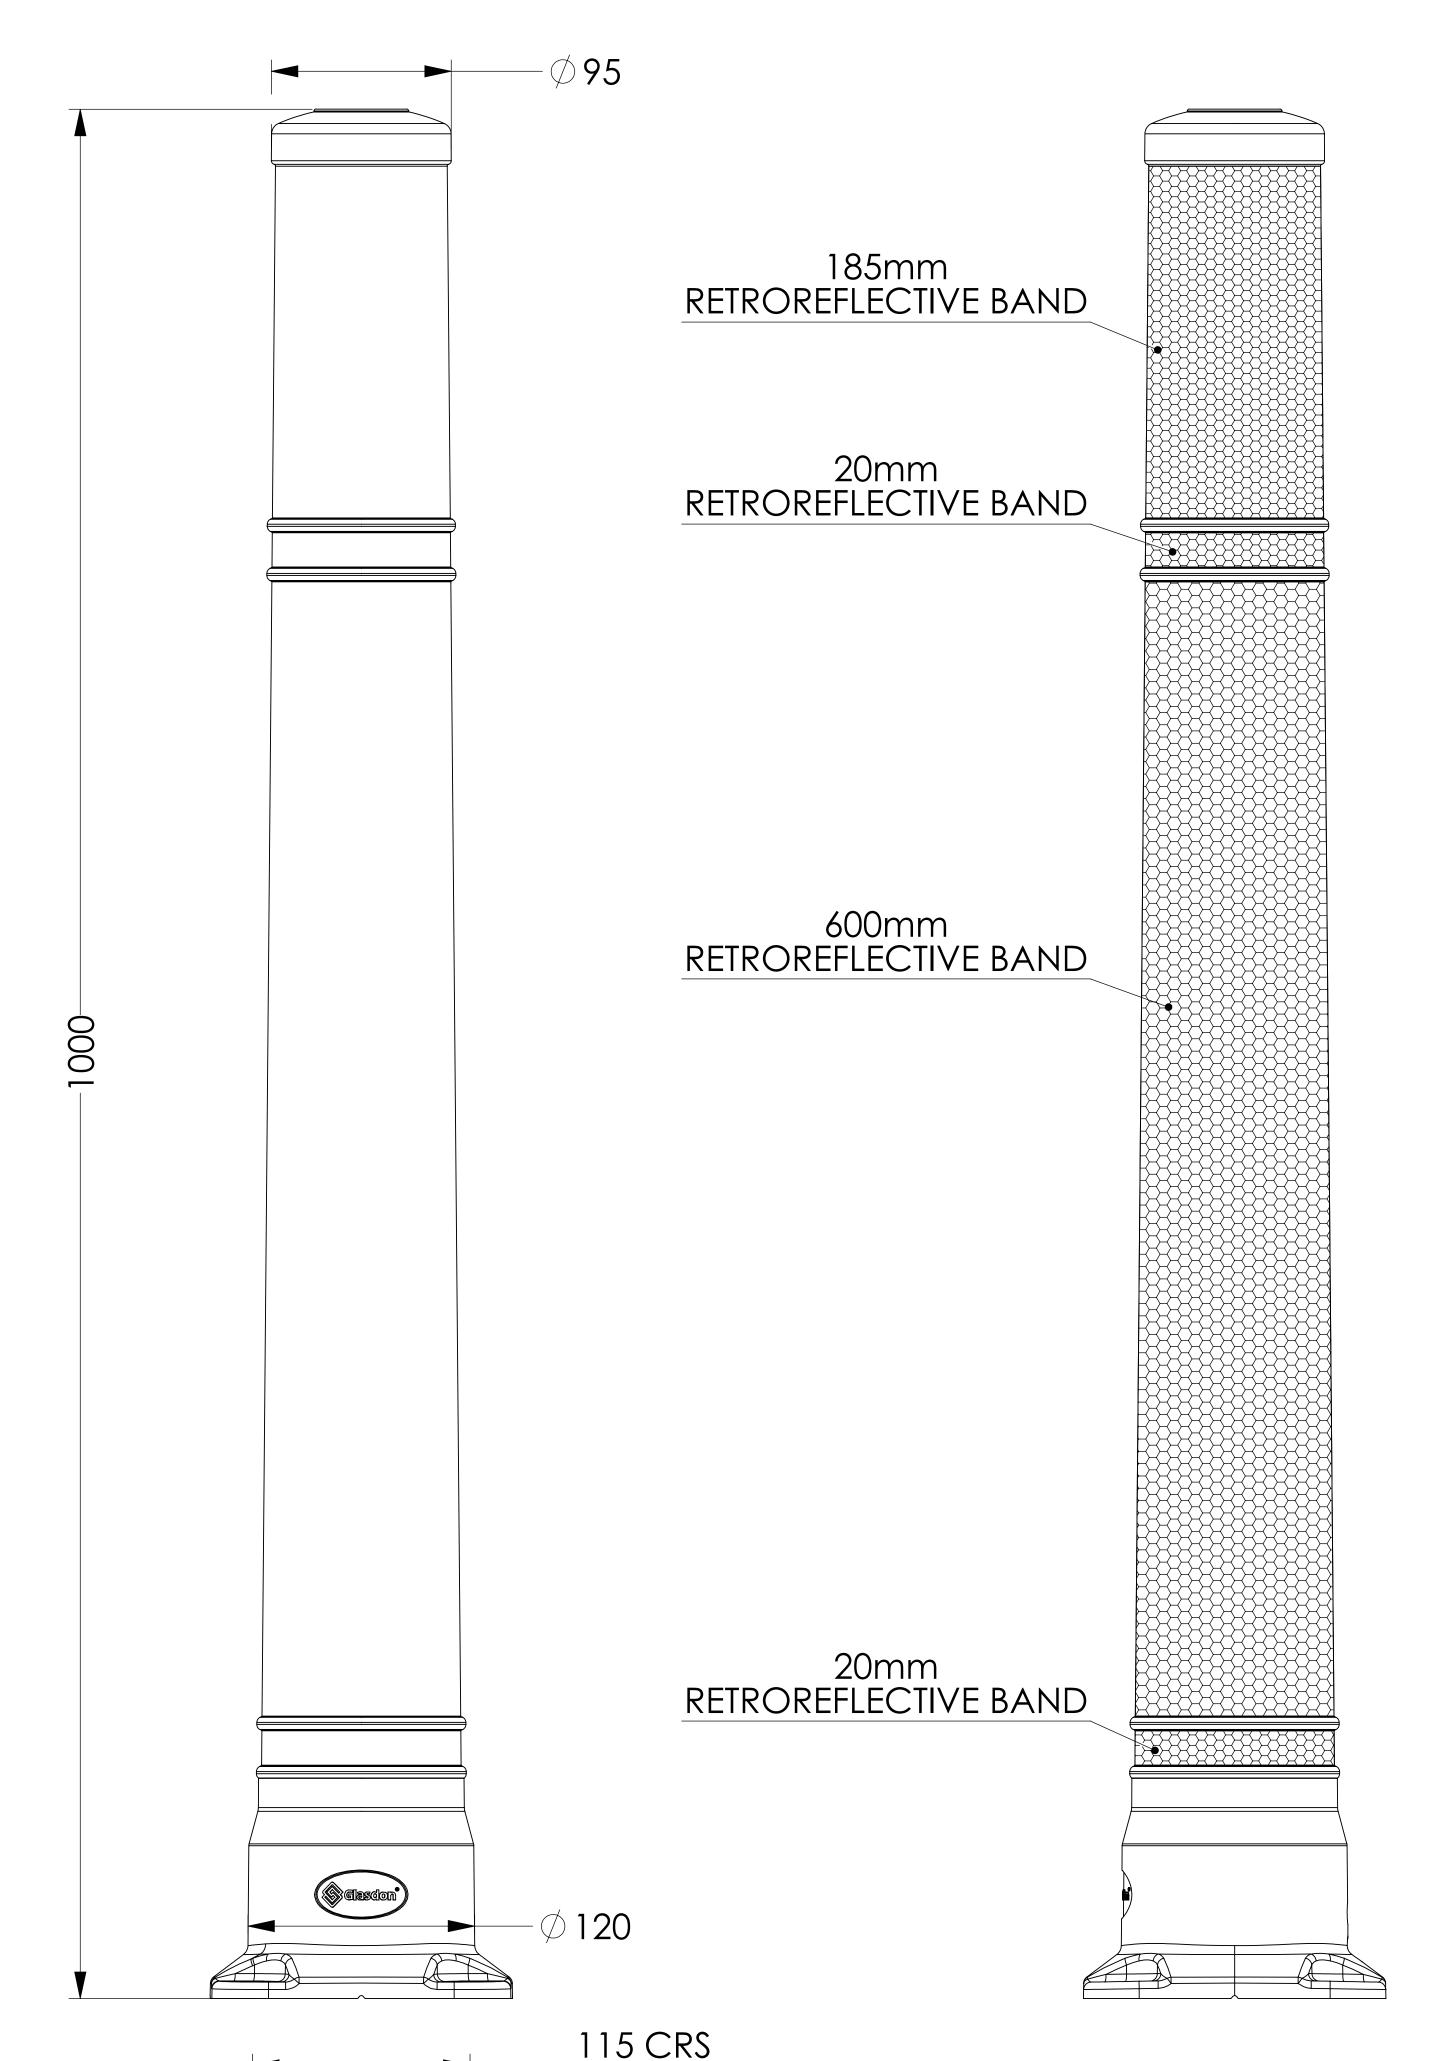

FIXING HOLES

CRS HOLES

115 FIXING

160

60

PRODUCT INFORMATION:

DESCRIPTION

REBOUNDABLE POST FOR DELINEATING TRAFFIC.

• MATERIAL

DELINEATOR POST: REFLEXAPOL®

GROUND FIXINGS: MILD STEEL BZP COATING

RETROREFLECTIVE BANDS: 3M - 3310 SERIES

• DIMENSIONS

ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED.

- COLOURS
- RED - BLACK
- WEIGHTS

DELINEATOR POST: 1.92kg

GROUND FIXINGS: 0.4kg

- BANDING OPTIONS
- 600mm RETROREFLECTIVE BAND (WHITE)
- 185mm RETROREFLECTIVE BAND (WHITE)
- 20mm RETROREFLECTIVE BAND TOP (WHITE)
- 185 & 20mm RETROREFLECTIVE BAND TOP / BOTTOM (WHITE)
- 2 x 20mm RETROREFLECTIVE BAND TOP / BOTTOM (WHITE)


INSTALLATION INSTRUCTIONS:

ITEM 1 - DELINEATOR POST ITEM 2 - SELF-TAPPING GROUND ANCHOR - M10 x 100mm ITEM 3 - WASHER - M12 x 28mm

KEEP A MINIMUM DISTANCE OF 100mm FROM ANY EDGE OF CONCRETE OR TARMAC BASE.

BANDING OPTIONS

- PLACE POST IN DESIRED POSITION / ORIENTATION.
- USING THE FIXING HOLES AS A GUIDE, DRILL 4 HOLES (∅ 10mm x 120mm (MINIMUM DEPTH)
- USING A 17mm SOCKET WRENCH, FIX THE POST DOWN USING THE SELF-TAPPING GROUND ANCHORS AND WASHERS. (4 OFF)
- DO NOT OVER TIGHTEN THE GROUND ANCHORS. TIGHTEN BY NO MORE THAN 1/4 TURN. (MAXIMUM TORQUE IN CONCRETE - 60Nm)

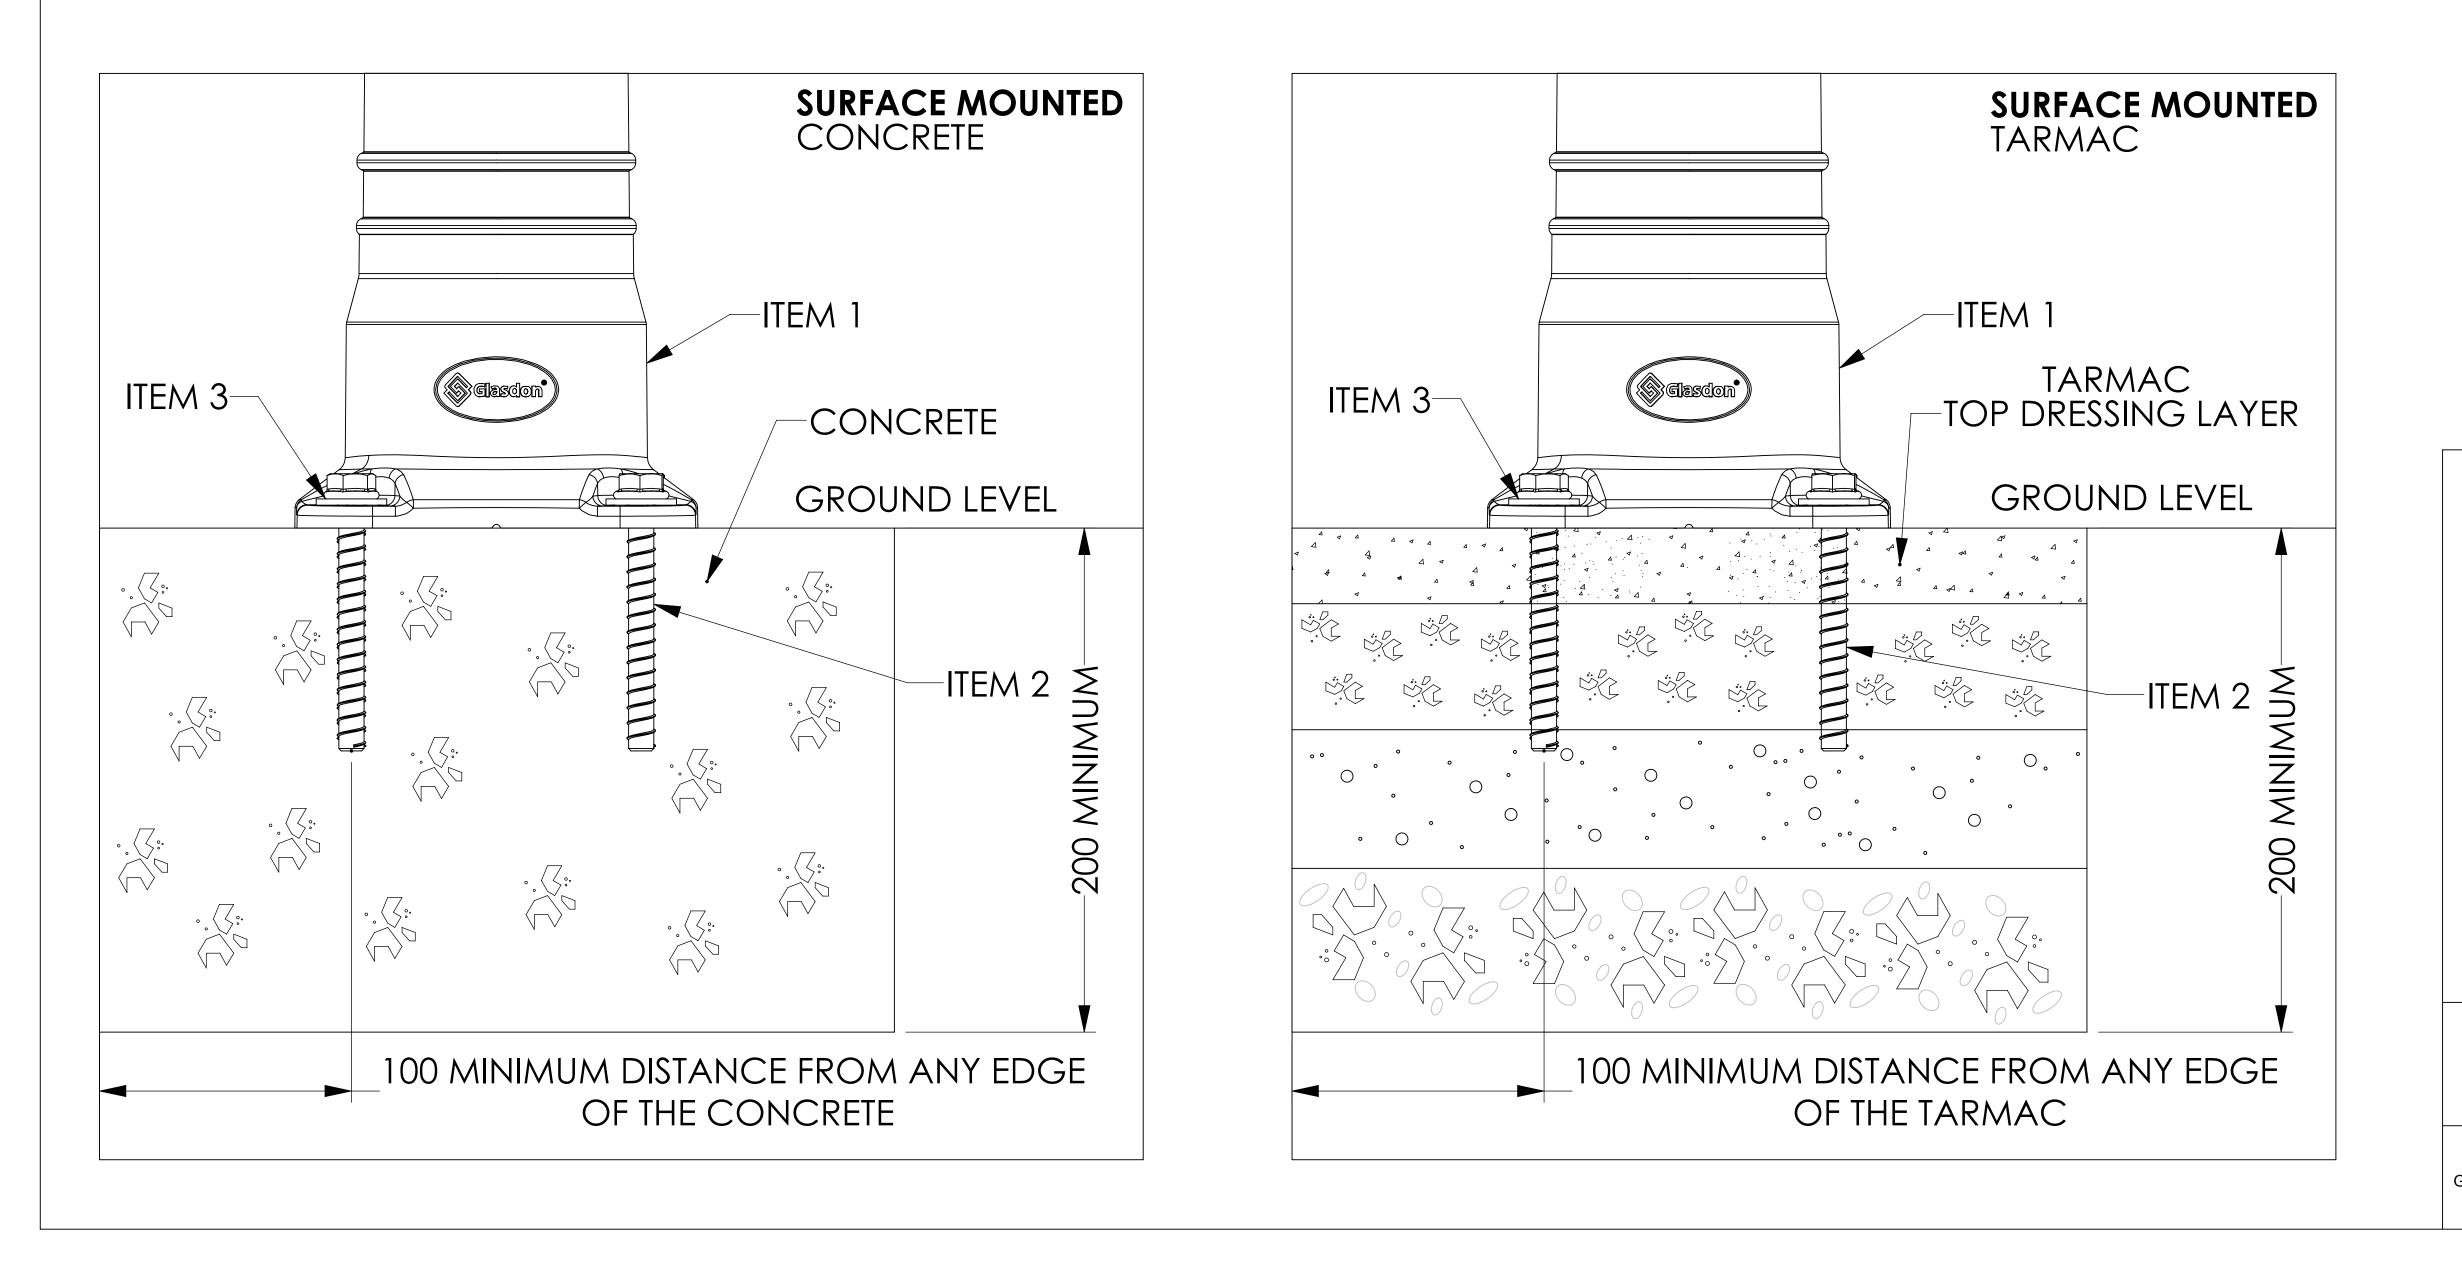



Website: www.glasdon.com Email: sales@glasdon.com Telephone: 01253 600 400 Facsimile: 01253 732558

Copyright of this dwg. is reserved by Glasdon Group. The issue of this dwg. is a confidential disclosure of its contents, and is made on condition that it is neither disclosed to a third party, nor any item described herein and designed by Glasdon Group, is produced either in whole or in part without the prior written consent of Glasdon Group.

SPECIFICATION NUMBER -02S090-S08

ISSUE 01

GLASDON GROUP LTD 16/03/22 SHEET SIZE : A0