

# FID(0) 25

# Dog Waste Bin Installation Instructions LAMP COLUMN ADAPTER KIT

IMPORTANT NOTE:- ENSURE THAT ALL RELEVANT PERSONNEL READ THE POINTS LISTED BELOW AND THAT A COPY IS PASSED ON TO STAFF INVOLVED WITH THE INSTALLATION

#### **Parts List**

Lamp Column Adapter Bracket x1

2. Bolt M8x30mm

x2 (Version B only)

3. Metal Spacer

x2 (Version B only)

4. Bridging 'C' Bracket

x1 (Version B only)

5. Bolt M8x20mm

6. Top Extension Bracket

7. Two hole Washer Plates


x2


### **Equipment Needed for Installation (Not Included)**


- . Spanner (13mm)
- . Screwdriver
- . Note: Tespa or Tamtorque Banding are not included with the kit, but are available from Glasdon UK Ltd. as separate Kits.

## **Assembly Instructions**

- 1. For lamp columns of differing profiles (B) use the bridging 'C' bracket (4) to extend the upper mounting.
- Fix using two hex head machine screw bolts (2), complete with spacer (3) into the pre-drilled attachment.
- The lamp column bracket may then be affixed to the post using the banding choice, ensuring inspection covers etc. remain accessible.
- 2. Using top extension bracket (6) assemble onto the lamp column bracket using bolts (5).
- 3. Offer the bin up to the brackets and with the lid open align both sets of holes up with the top extension bracket (6) and fix using two hole washer plates (7) and bolts (5).
  - Repeat operation for the lower fixing points, ensuring all fixings are fully secured.

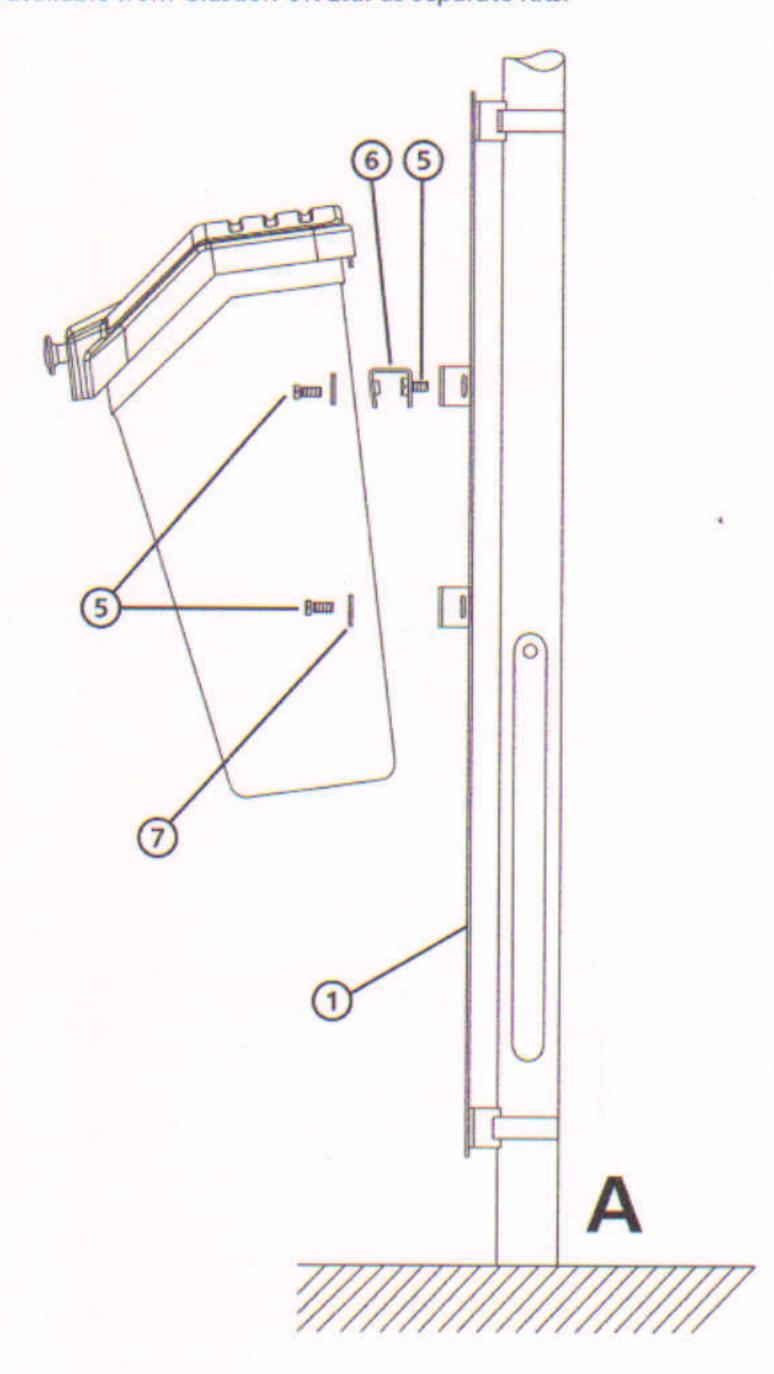

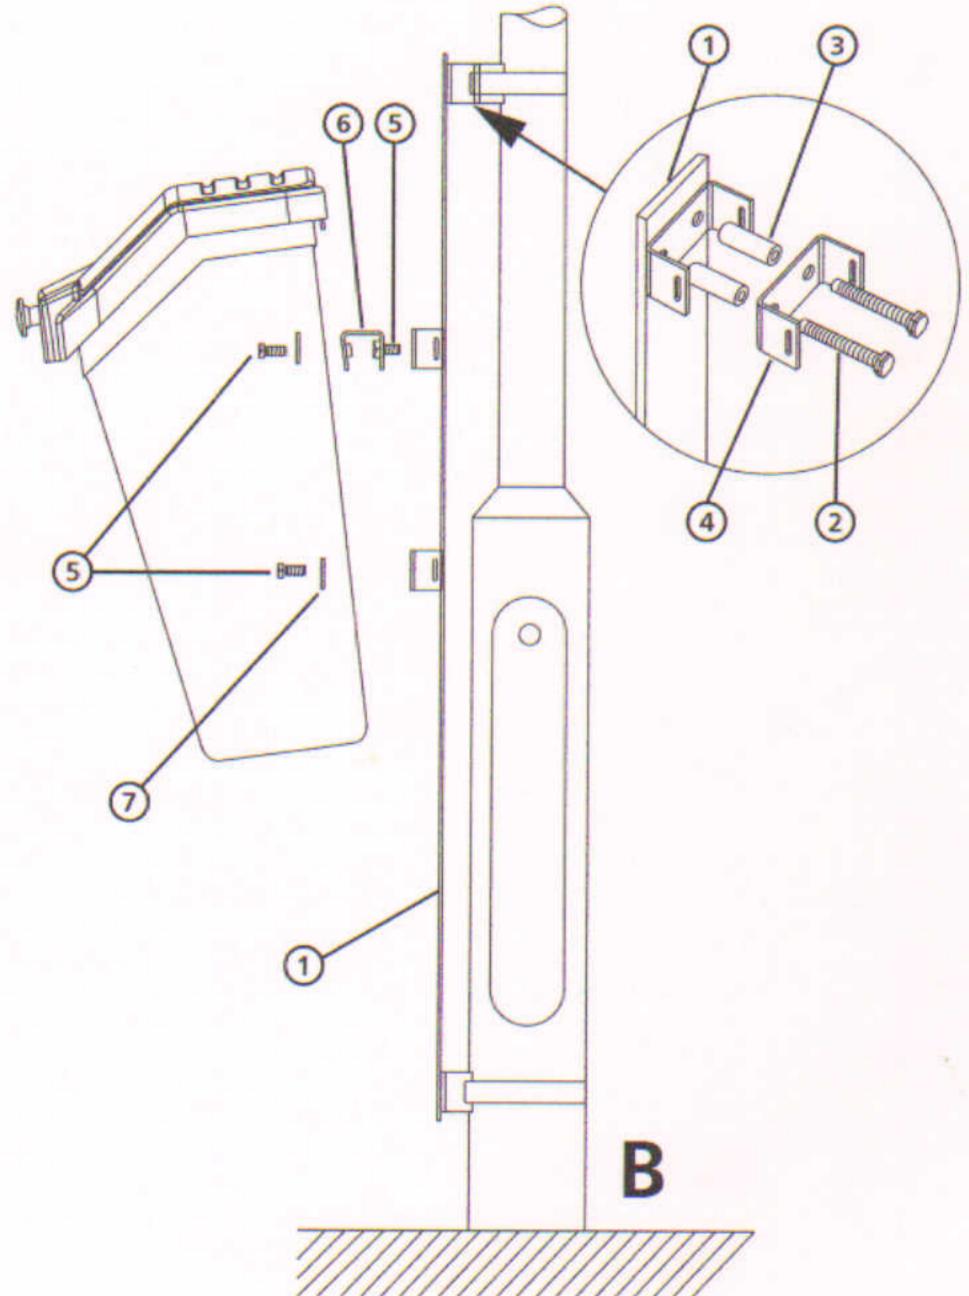



- A planned maintenance schedule of regular inspection is recommended, replacing components as necessary.
- Replacement components are available direct from GLASDON.
- GLASDON cannot be held responsible for claims arising from incorrect installation, unauthorised modifications or misuse of the product.



Glasdon

Glasdon U.K. Limited

Preston New Road BLACKPOOL Lancashire FY4 4UL

Tel: (01253) 600410 Fax: (01253) 792558

e-mail: sales@glasdon-uk.co.uk web:www.glasdon.com

Issue 2 May 2005 Stock no. C000/0242 © Copyright May 2005. Glasdon reserve the right to alter specification without prior notice.